

X-FACTOR




SPECIFICATIONS

Construction	LOOP
Product	X-Factor
Pile Fiber Composition	100% Nylon (Polyamide 6)
Yarn Type	BCF
Dye Method	Solution Dyed
Pile Weight	750 g/m ²
Number of Tufts	251220/m ²
Tufting Gauge	1/12"
Primary Backing	Non-Woven
Secondary Backing	StableShield -100% Vinyl
Optional Backings	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
Tile Size	50 cm x 50 cm & 50 cm x 100 cm
Pile Height	3.0 mm / 6.5 mm
Total Tile Height	8.5 mm
Pile Treatment	INVISTA Anti-Soil treatment, Anti-Microbial (Optional)
Recommended Installation	Brick or Quarter Turn: Tile Brick, Basket, Half Basket, Herringbone: Plank

Performance Specifications

Wear Classification	Heavy Contract	
VOC Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class 1
Static Propensity	ISO 6356	0.2 KV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² /KW
Impact Sound Insulation	ISO 140-8	23dB
Sound Absorption Level	EN ISO 11654	w: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	<450

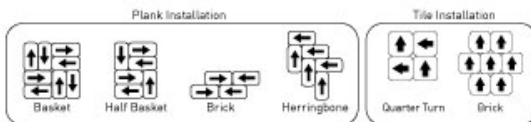

Corporate Headquarter:
2304 Swiss Jumeira Lake Towers
Dubai-UAE

Manufacturing: [30th September 2014]
Standard Carpets Ind. LLC.
Post box No. 490014, Plot No. 5315801
Dubai Industrial City, Dubai UAE

Sample Request:
Standard Carpets Ind. LLC.
Plot 94, Industrial Area 1,
Sharjah UAE
Phone:+971 6 532 3777
Fax:+971 6 533 3637
Email: carpets@emirates.net.ae

Made in UAE by
Standard Carpets.
The largest manufacturer of tufted
carpets and the only manufacturer
of carpet tiles in the Emirates.

Standard Carpets are manufactured
under the environmental quality
system certified and complying with
ISO 18001 by an accredited
certification body.

www.standardcarpets.com