




C H E R O K E E



CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable
DYE METHOD	Solution Dyed
PILE WEIGHT	780g/m2
NUMBER OF TUFTS	260700/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5mm - 6.0mm
TOTAL HEIGHT	8.00mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE




CHEROKEE - CC-826



CHEROKEE - CC-846



CHEROKEE - CC-847




CHEROKEE - CC-848




CHEROKEE - CC-859



CHEROKEE - CC-876



CHEROKEE - CC-877




CHEROKEE - CC-879




CHEROKEE - CC-894




CHEROKEE - CC-895




CHEROKEE - 826



CHEROKEE - 846




CHEROKEE - 847




CHEROKEE - 848




CHEROKEE - 859




CHEROKEE - 876



CHEROKEE - 877



CHEROKEE - 879




CHEROKEE - 894




CHEROKEE - 895



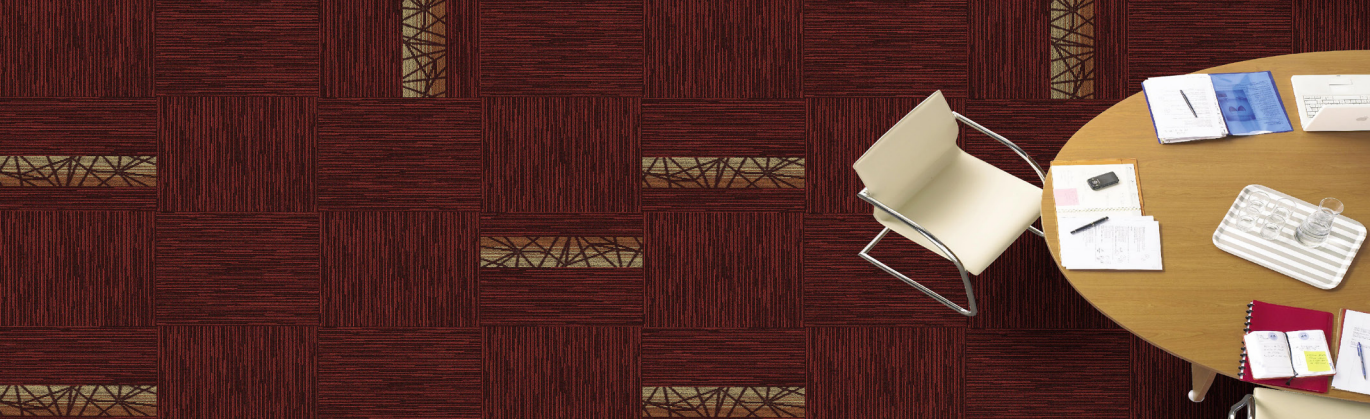


HOW TO INSTALL

QUARTER TURN

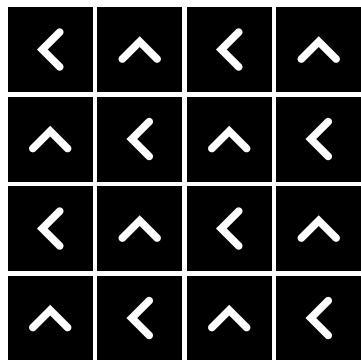

BRICK

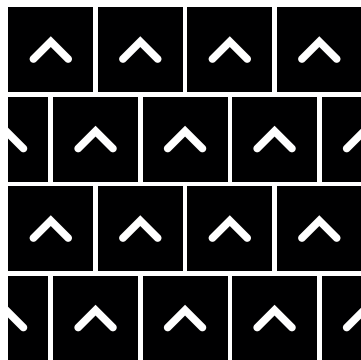



Standard
CARPETS

www.standardcarpets.com