

BANGKOK HILTON



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable
DYE METHOD	Solution Dyed
PILE WEIGHT	610 g/m2
NUMBER OF TUFTS	184860/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.3 mm / 5.5 mm
TOTAL HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick




SPECIFICATIONS

COLOURLINE



Bangkok Hilton - 627




Bangkok Hilton - 646




Bangkok Hilton - 647



Bangkok Hilton - 648



Bangkok Hilton - 657



Bangkok Hilton - 658



Bangkok Hilton - 674



Bangkok Hilton - 675



Bangkok Hilton - 677




Bangkok Hilton - 678






HOW TO INSTALL

QUARTER TURN

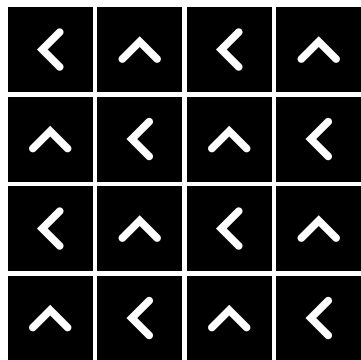

BRICK

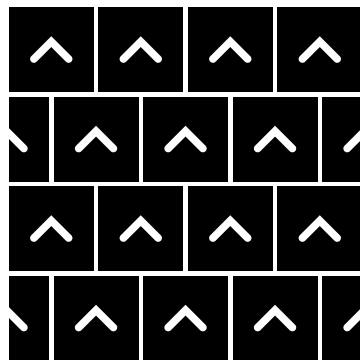



Standard
CARPETS

www.standardcarpets.com