



BOARDROOM

CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	CABLE
DYE METHOD	Solution Dyed
PILE WEIGHT	650g/m2
NUMBER OF TUFTS	193930/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.2mm-5.5mm
TOTAL HEIGHT	8.0mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


COLOURLINE




BOARD ROOM - 645




BOARD ROOM - 648



BOARD ROOM - 654



BOARD ROOM - 657



BOARD ROOM - 664




BOARD ROOM - 667



BOARD ROOM - 675



BOARD ROOM - 667



BOARD ROOM - 677




BOARD ROOM - 679






HOW TO INSTALL

QUARTER TURN

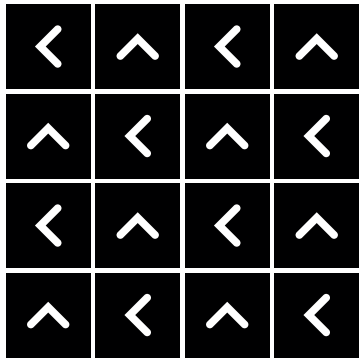

BRICK

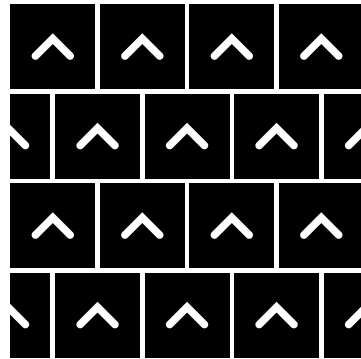



Standard
CARPETS

www.standardcarpets.com