


# CONNECTION




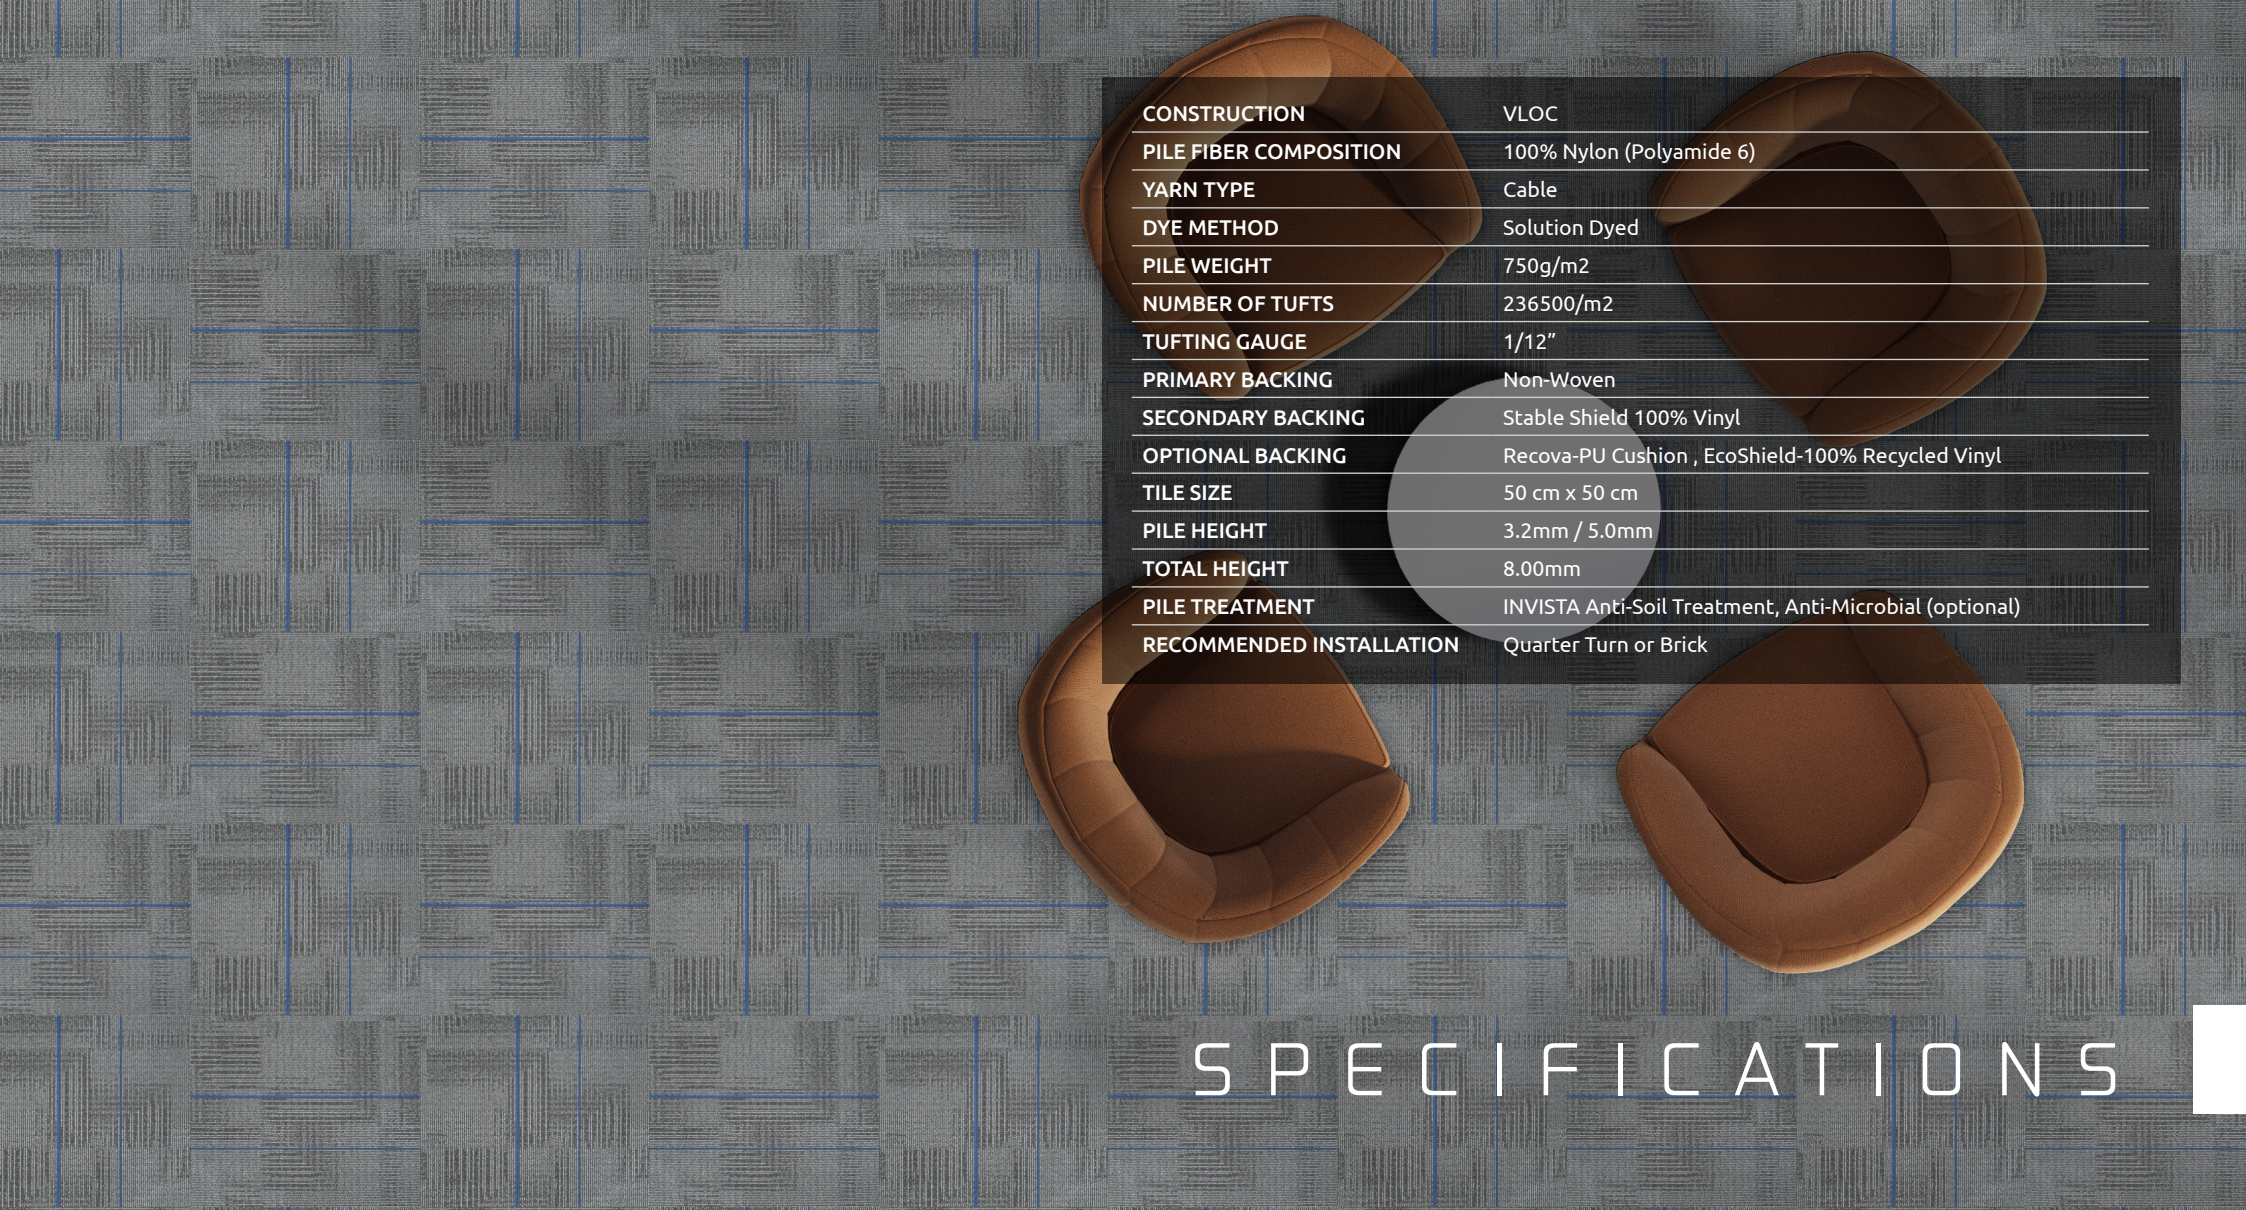

<b>CONSTRUCTION</b>	VLOC
<b>PILE FIBER COMPOSITION</b>	100% Nylon (Polyamide 6)
<b>YARN TYPE</b>	Cable
<b>DYE METHOD</b>	Solution Dyed
<b>PILE WEIGHT</b>	750g/m2
<b>NUMBER OF TUFTS</b>	236500/m2
<b>TUFTING GAUGE</b>	1/12"
<b>PRIMARY BACKING</b>	Non-Woven
<b>SECONDARY BACKING</b>	Stable Shield 100% Vinyl
<b>OPTIONAL BACKING</b>	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
<b>TILE SIZE</b>	50 cm x 50 cm
<b>PILE HEIGHT</b>	3.2mm / 5.0mm
<b>TOTAL HEIGHT</b>	8.00mm
<b>PILE TREATMENT</b>	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
<b>RECOMMENDED INSTALLATION</b>	Quarter Turn or Brick

# SPECIFICATIONS

# COLOURLINE



CONNECTION - 843



CONNECTION - 846



CONNECTION - 847



CONNECTION - 848



CONNECTION - 849



CONNECTION - 858



CONNECTION - 859




CONNECTION - 871



CONNECTION - 872



CONNECTION - 876




CONNECTION - 879






# HOW TO INSTALL

**QUARTER TURN**

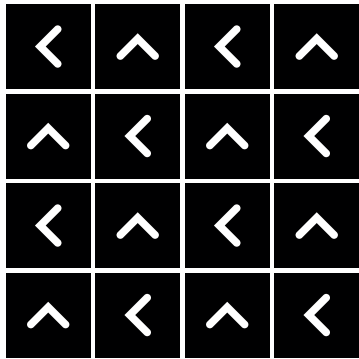

**BRICK**

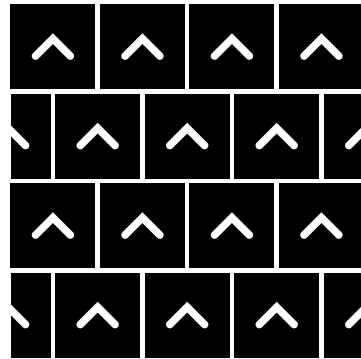



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)