

DXB





CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable & BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750g/m ²
NUMBER OF TUFTS	260150/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.2mm/5.0mm
TOTAL HEIGHT	8.00mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE



DXB - 626



DXB - 648



DXB - 658



DXB - 659



DXB - 664




DXB - 673




DXB - 674



DXB - 675



DXB - 676



DXB - 679




DXB - 695






HOW TO INSTALL

QUARTER TURN

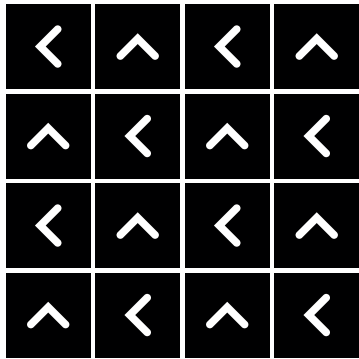

BRICK

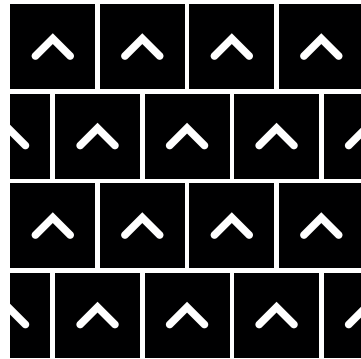



Standard
CARPETS

www.standardcarpets.com