




FLOW



CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750g/m2
NUMBER OF TUFTS	232260/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	Stable Shield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0mm / 5.0mm
TOTAL HEIGHT	7.00mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE




FLOW - 843



FLOW - 846



FLOW - 847



FLOW - 848




FLOW - 849




FLOW - 856




FLOW - 859



FLOW - 871



FLOW - 872



FLOW - 876




FLOW - 879






HOW TO INSTALL

QUARTER TURN

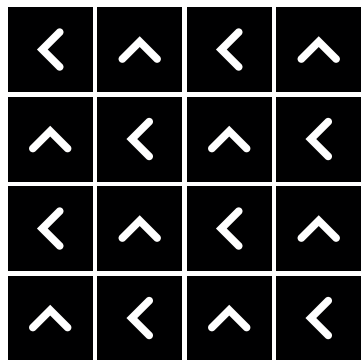

BRICK

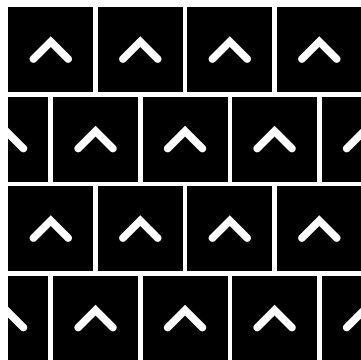



Standard
CARPETS

www.standardcarpets.com