

FREQUENT
FLIER




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable
DYE METHOD	Solution Dyed
PILE WEIGHT	610 g/m ²
NUMBER OF TUFTS	194340/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.3 mm / 5.5 mm
TOTAL HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick


SPECIFICATIONS



COLOURLINE




Frequent Flier - 645




Frequent Flier - 648




Frequent Flier - 654




Frequent Flier - 657




Frequent Flier - 664




Frequent Flier - 667




Frequent Flier - 675



Frequent Flier - 666



Frequent Flier - 677




Frequent Flier - 679






HOW TO INSTALL

QUARTER TURN

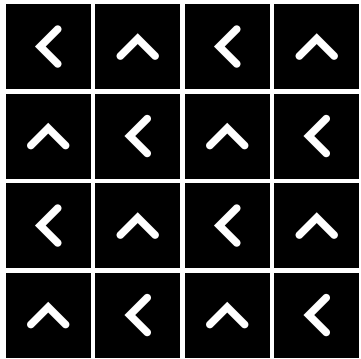

BRICK

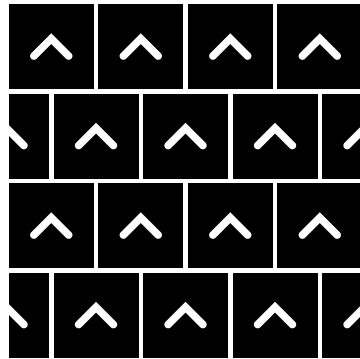



Standard
CARPETS

www.standardcarpets.com