




INDULGE




CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Solution Dyed Nylon ( Polyamide 6)
YARN TYPE	BCF
PILE WEIGHT	750g/m2
NUMBER OF TUFTS	260700 /m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , Eco-Shield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.5 mm / 5.0 mm
TOTAL HEIGHT	7.0 mm
PILE TREATMENT	INVISTA Anti - Soil , Anti-Microbial ( Optional )
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


# COLOURLINE




INDULGE-744




INDULGE-757




INDULGE-770



INDULGE-773




INDULGE-777



INDULGE-7720




INDULGE-7724



INDULGE-7730




INDULGE-7741




INDULGE-7743




INDULGE-7747



INDULGE-7752



INDULGE-7753



INDULGE-7754



INDULGE-7760




INDULGE-7761




INDULGE-7762




INDULGE-7771




INDULGE-7775

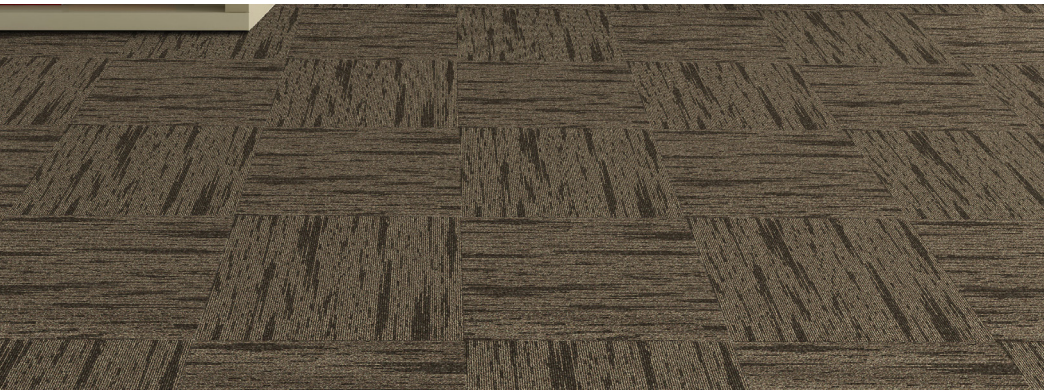

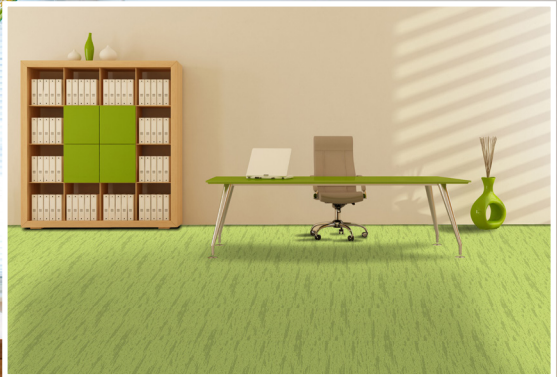


# HOW TO INSTALL

**QUARTER TURN**

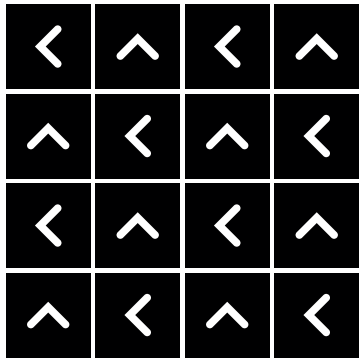

**BRICK**

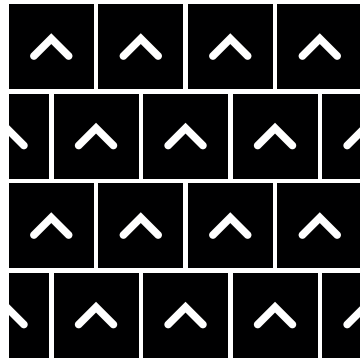



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)