



INTER CEPTION

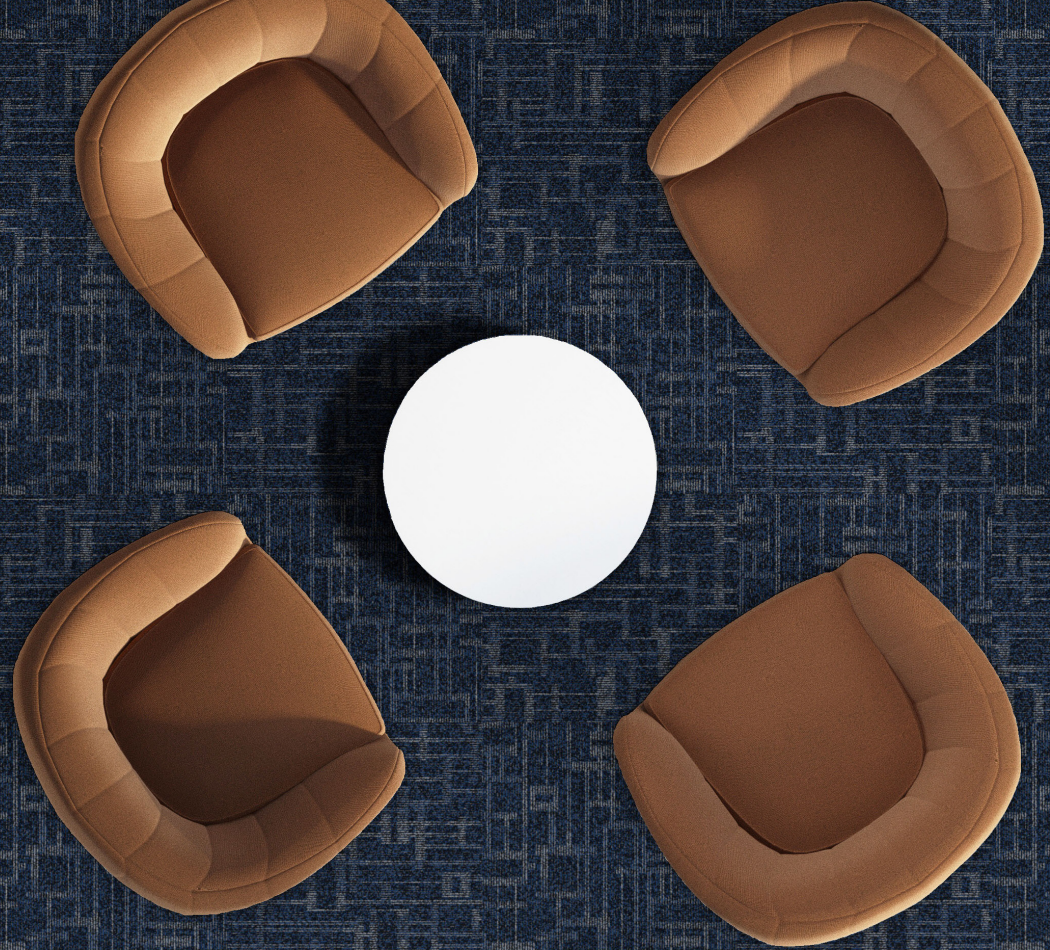

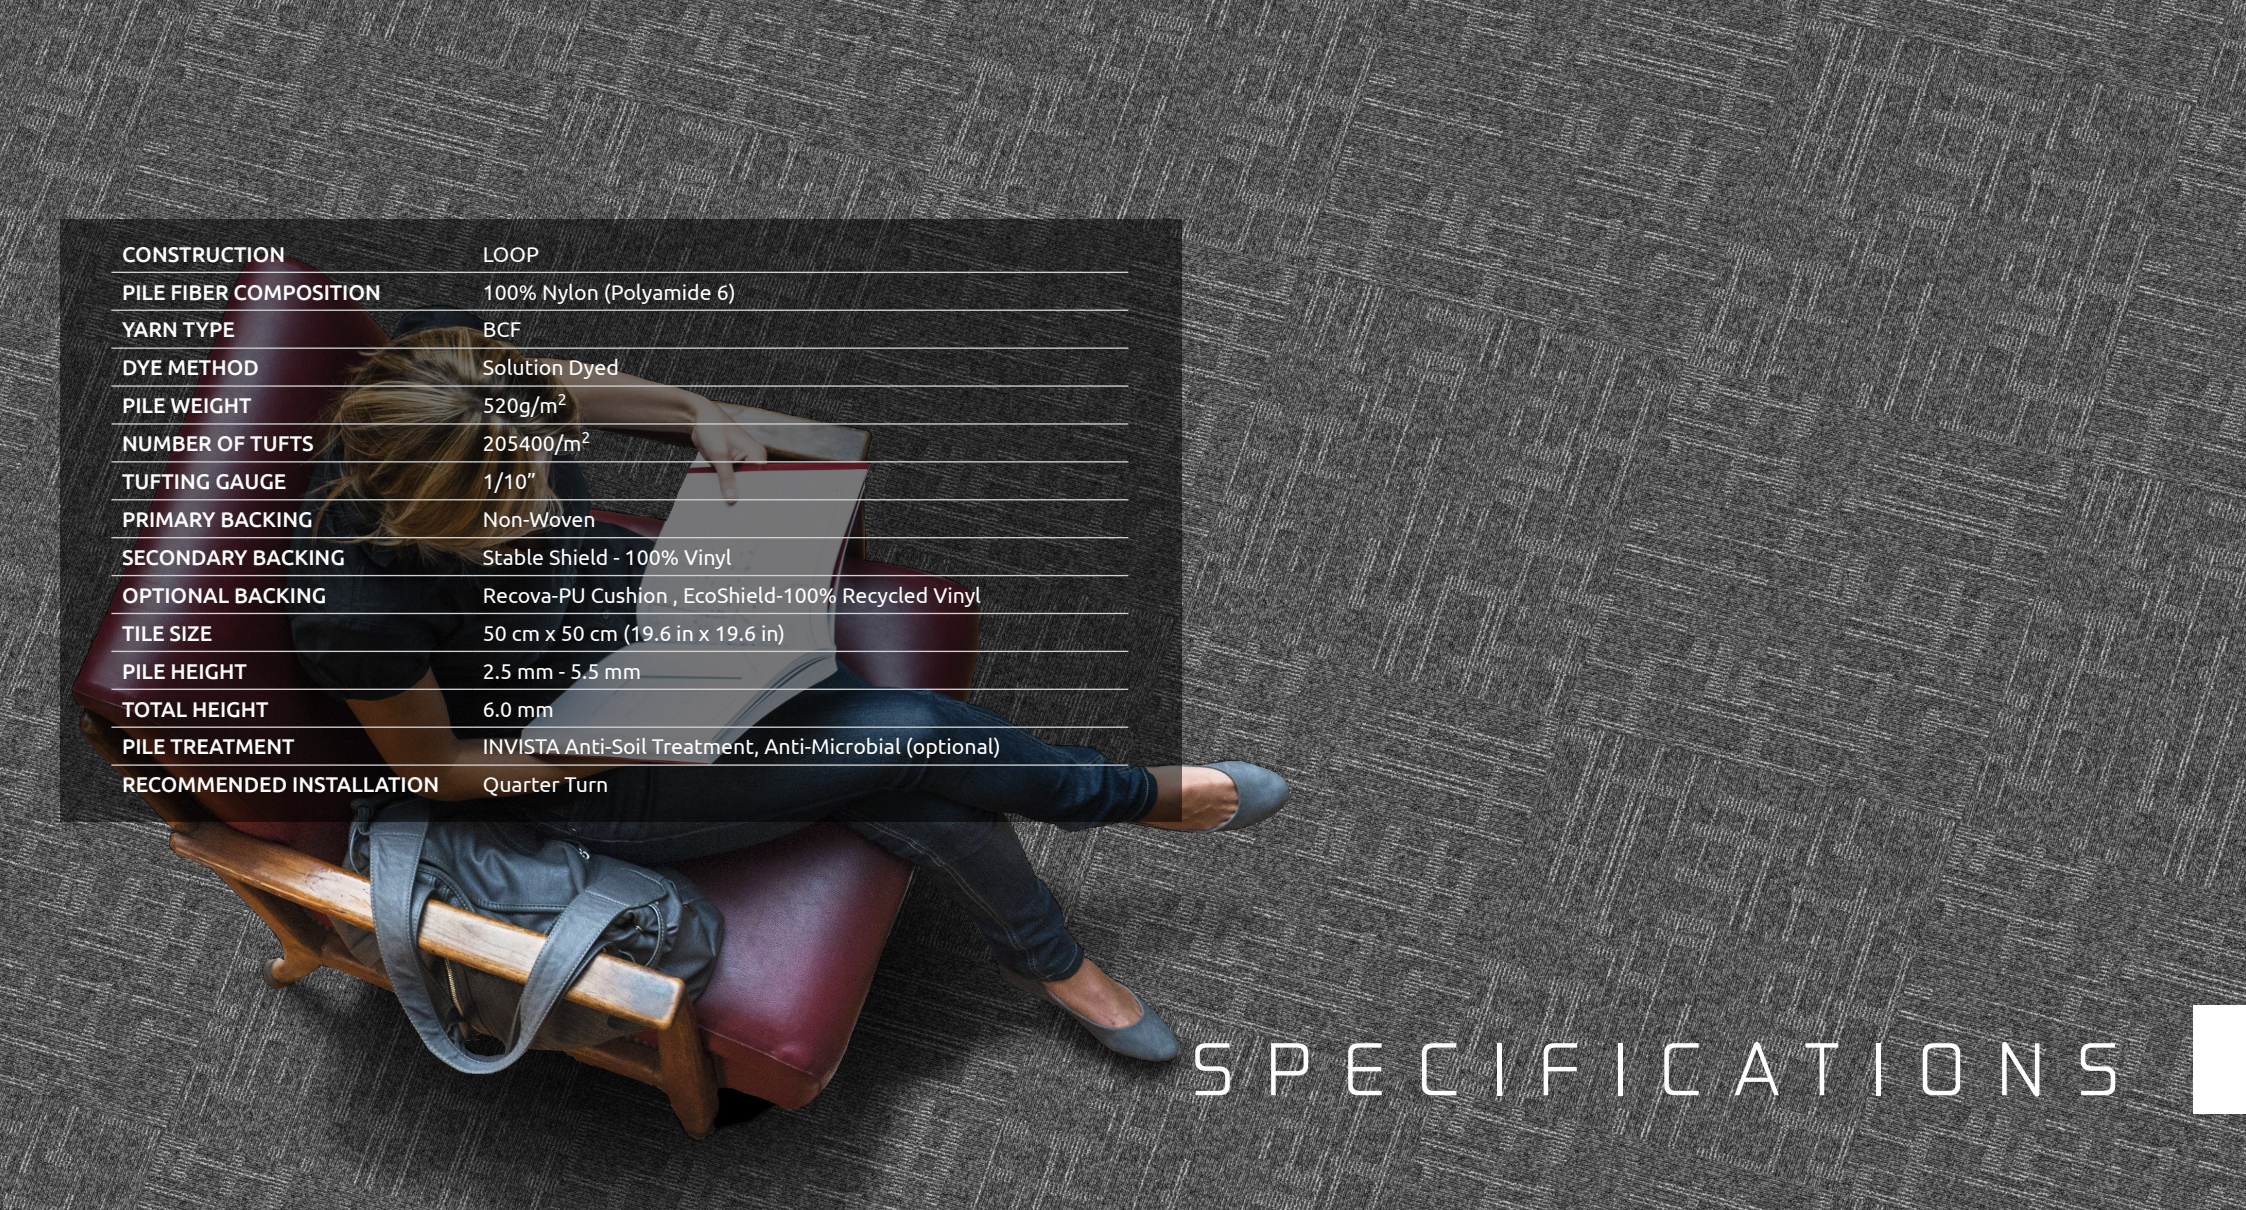


CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	520g/m ²
NUMBER OF TUFTS	205400/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm (19.6 in x 19.6 in)
PILE HEIGHT	2.5 mm - 5.5 mm
TOTAL HEIGHT	6.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATIONS


COLOURLINE




INTERCEPTION - 546




INTERCEPTION - 547




INTERCEPTION - 555



INTERCEPTION - 556



INTERCEPTION - 573




INTERCEPTION - 575





HOW TO INSTALL

QUARTER TURN

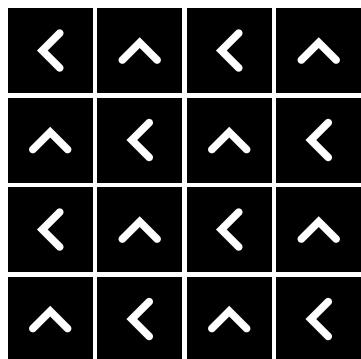



Standard
CARPETS

www.standardcarpets.com