




INTER SECTION



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	520 g/m ²
NUMBER OF TUFTS	205400/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-Pu Cushion, Eco Shield 100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm (19.6" x 19.6")
PILE HEIGHT	2.5 mm - 5.5 mm
TOTAL HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATIONS


COLOURLINE




INTERSECTION - 546




INTERSECTION - 547




INTERSECTION - 555



INTERSECTION - 556



INTERSECTION - 573




INTERSECTION - 575



HOW TO INSTALL

QUARTER TURN

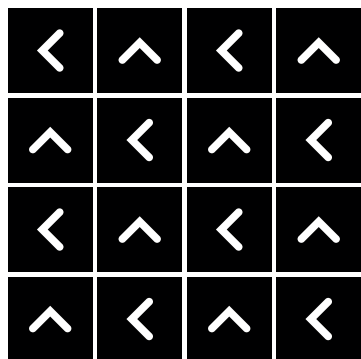



Standard
CARPETS

www.standardcarpets.com