

IRIS




CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750g/m ²
NUMBER OF TUFTS	260700/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	Stable Shield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0mm / 5.0mm
TOTAL HEIGHT	7.0mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

S P E C I F I C A T I O N S


COLOURLINE




IRIS - 626



IRIS - 648



IRIS - 658




IRIS - 659



IRIS - 664




IRIS - 673



IRIS - 674




IRIS - 675





IRIS - 676



IRIS - 679




IRIS - 695

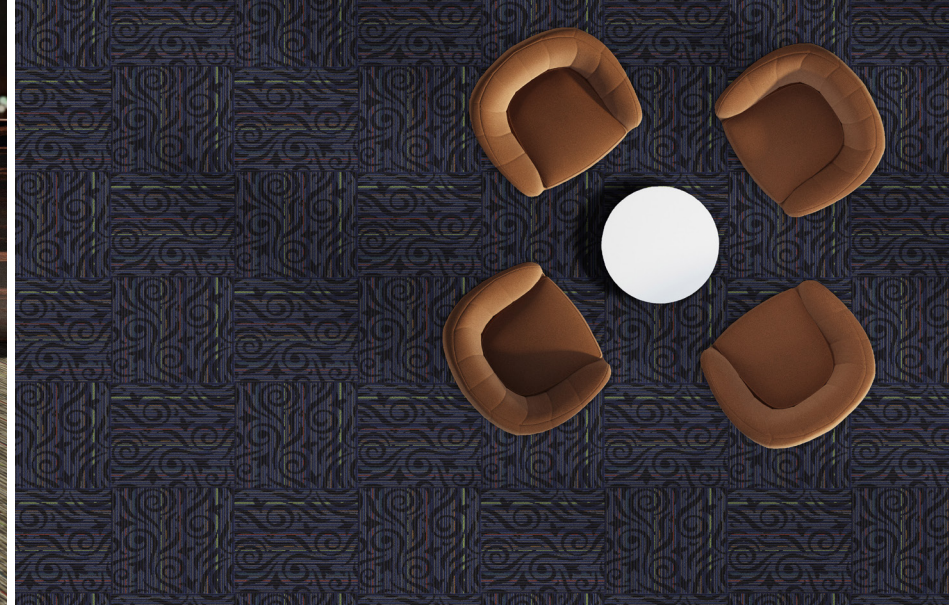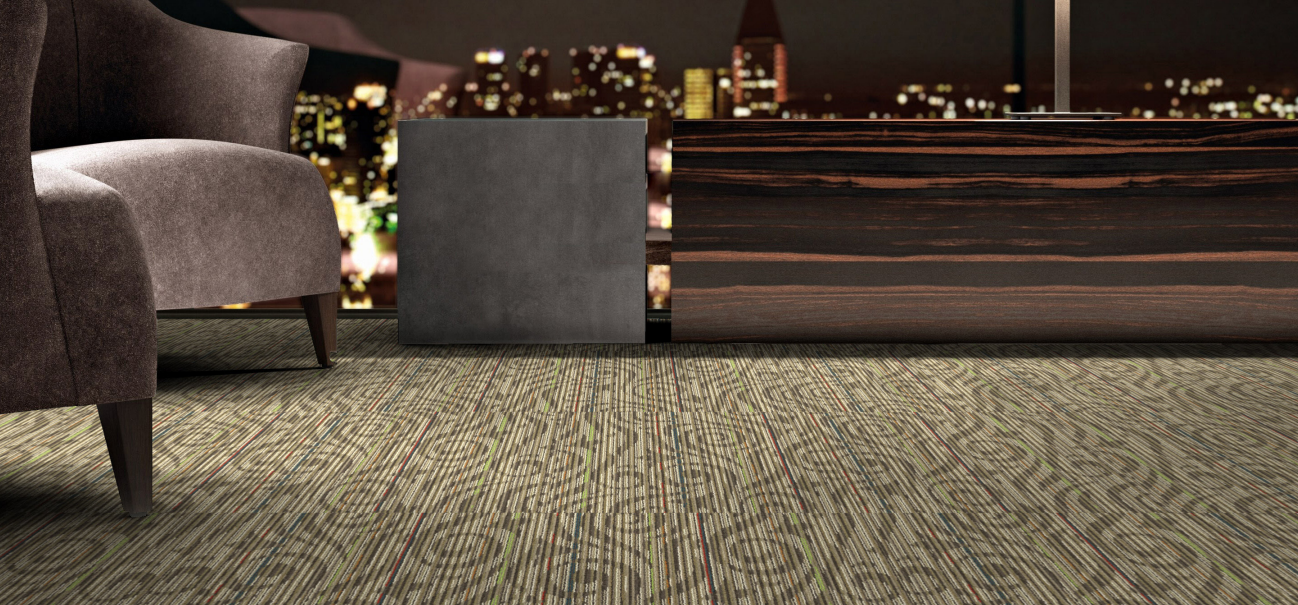




HOW TO INSTALL

QUARTER TURN

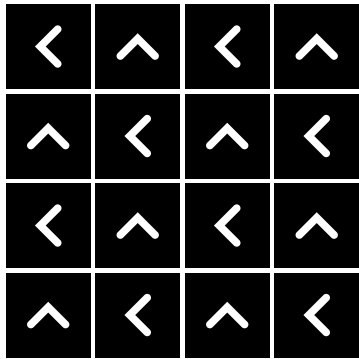

BRICK

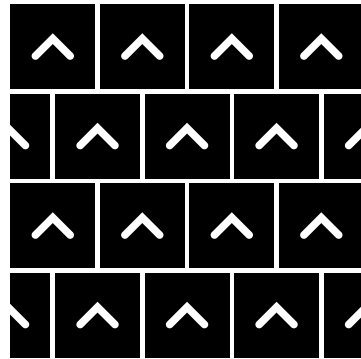



Standard
CARPETS

www.standardcarpets.com