



L . A

**CONSTRUCTION**

VLOC

PILE FIBER COMPOSITION

100% Nylon (Polyamide 6)

YARN TYPE

Cable

DYE METHOD

Solution Dyed

PILE WEIGHT780g/m²**NUMBER OF TUFTS**260700/m²**TUFTING GAUGE**

1/12"

PRIMARY BACKING

Non-Woven

SECONDARY BACKING

Stable Shield - 100% Vinyl

OPTIONAL BACKING

Recova-PU Cushion , EcoShield-100% Recycled Vinyl

TILE SIZE

50 cm x 50 cm

PILE HEIGHT

2.5mm - 6.0mm

TOTAL HEIGHT

8.0mm

PILE TREATMENT

INVISTA Anti-Soil Treatment, Anti-Microbial (optional)

RECOMMENDED INSTALLATION

Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE



L.A. - CC-746




L.A. - CC-747




L.A. - CC-748



L.A. - CC-776



L.A. - CC-777



L.A. - CC-779



L.A. - CC-794



L.A. - CC-795




L.A. - 746




L.A. - 747




L.A. - 748



L.A. - 776



L.A. - 777



L.A. - 779



L.A. - 794




L.A. - 795






HOW TO INSTALL

QUARTER TURN

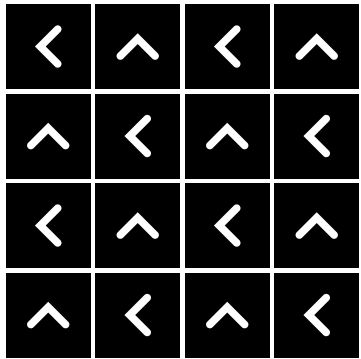

BRICK

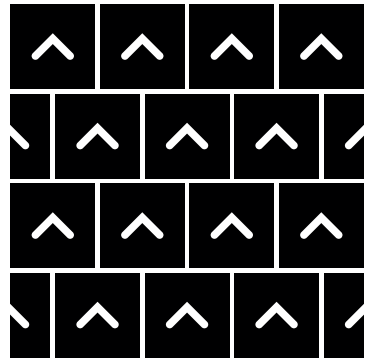



Standard
CARPETS

www.standardcarpets.com