




MISSION
STREET



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	580 g/m2
NUMBER OF TUFTS	189600 /m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5 mm - 5.3 mm
TOTAL HEIGHT	8.0mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

S P E C I F I C A T I O N S


COLOURLINE



MISSION STREET - 6643




MISSION STREET - 6644




MISSION STREET - 6646



MISSION STREET - 6647




MISSION STREET - 6657




MISSION STREET - 6670




MISSION STREET - 6671



MISSION STREET - 6672




MISSION STREET - 6673



MISSION STREET - 6674



MISSION STREET - 6675




MISSION STREET - 6677






HOW TO INSTALL

QUARTER TURN

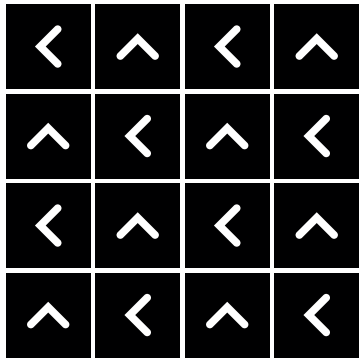

BRICK

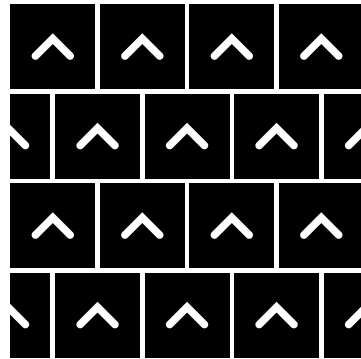



Standard
CARPETS

www.standardcarpets.com