

PARAMOUNT





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	530g/m2
NUMBER OF TUFTS	204800/m2
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm (19.6" x 19.6")
PILE HEIGHT	3.0 mm
TOTAL PILE HEIGHT	6.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE




PARAMOUNT - 544



PARAMOUNT - 545



PARAMOUNT - 548



PARAMOUNT - 557



PARAMOUNT - 573



PARAMOUNT - 574



PARAMOUNT - 575



PARAMOUNT - 576



PARAMOUNT - 577




PARAMOUNT - 578






HOW TO INSTALL

QUARTER TURN

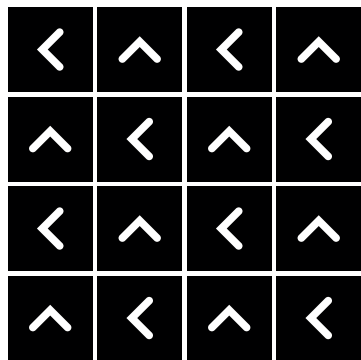

BRICK

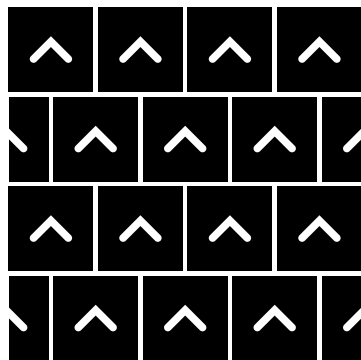



Standard
CARPETS

www.standardcarpets.com