



PREQUEL



CONSTRUCTION	Loop
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	680g/m ²
NUMBER OF TUFTS	241740/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0mm / 5.0mm
TOTAL HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS


COLOURLINE




PREQUEL - 646




PREQUEL - 658



PREQUEL - 670




PREQUEL - 671



PREQUEL - 672



PREQUEL - 673



PREQUEL - 674



PREQUEL - 675



PREQUEL - 678



PREQUEL - 690



PREQUEL - 696




PREQUEL - 697






HOW TO INSTALL

QUARTER TURN

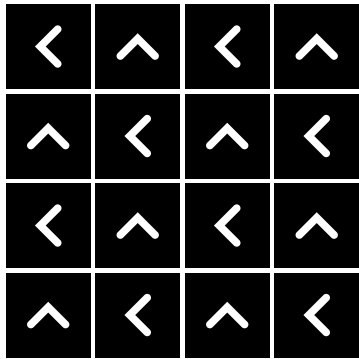

MONOLITHIC

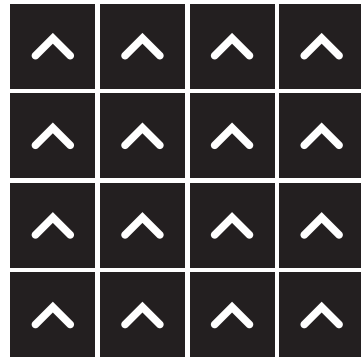



Standard
CARPETS

www.standardcarpets.com