




RODEO DRIVE



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Solution Dyed Nylon (Polyamide 6)
YARN TYPE	BCF
PILE WEIGHT	650 g/m2
NUMBER OF TUFTS	218040 /m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	Stable Shield 100% Vinyl
TILE SIZE	25 cm x 100 cm (9.8 in x 39.2 in)
PILE HEIGHT	2.5 mm / 5.5 mm
TOTAL HEIGHT	8.5 mm
PILE TREATMENT	INVISTA Anti – Soil Treatment ,Anti-Microbial(Optional)
RECOMMENDED INSTALLATION	Quarter Turn , Herringbone , Ashlar , Semi-Ashlar or Random Plank

SPECIFICATIONS

COLOURLINE



Rodeo Drive 645



Rodeo Drive 647



Rodeo Drive 649




Rodeo Drive 658



Rodeo Drive 673



Rodeo Drive 675



Rodeo Drive 676



Rodeo Drive 677



Rodeo Drive 6645



Rodeo Drive 6647



Rodeo Drive 6649



Rodeo Drive 6658



Rodeo Drive 6673





Rodeo Drive 6675




Rodeo Drive 6676



Rodeo Drive 6677

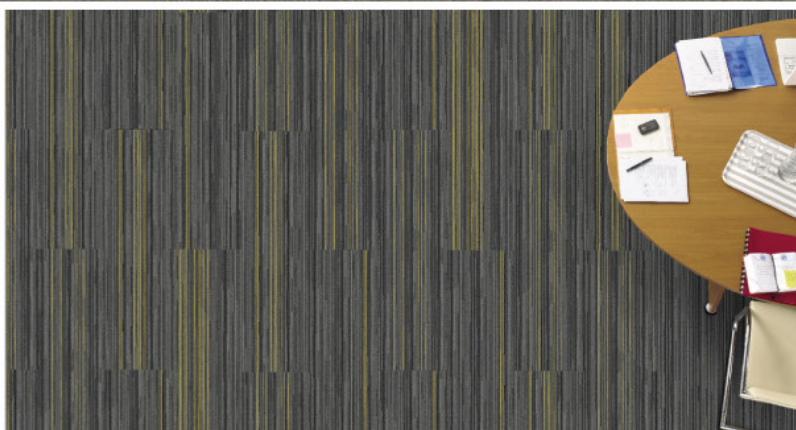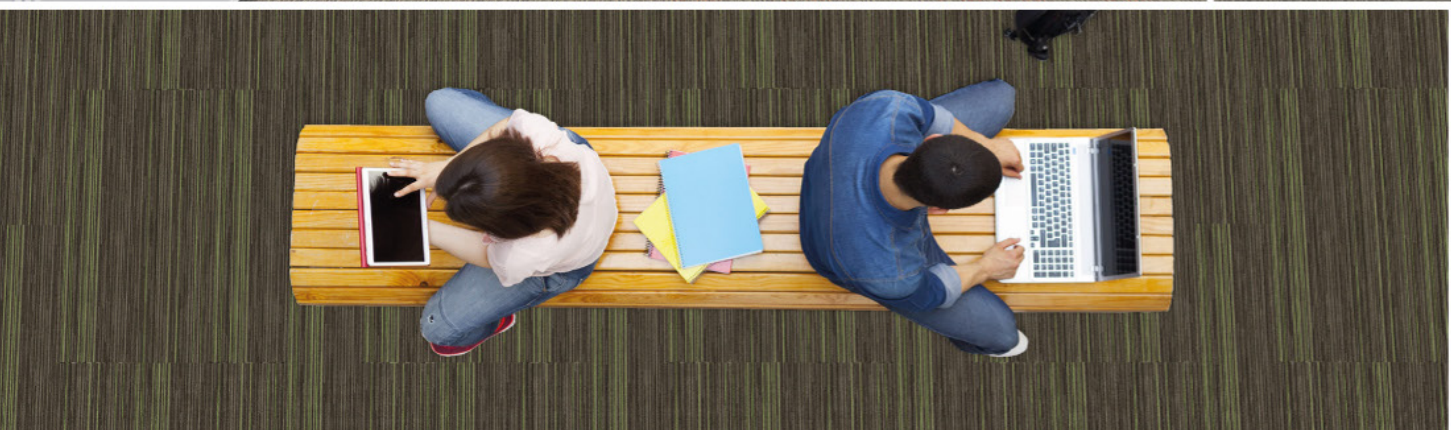




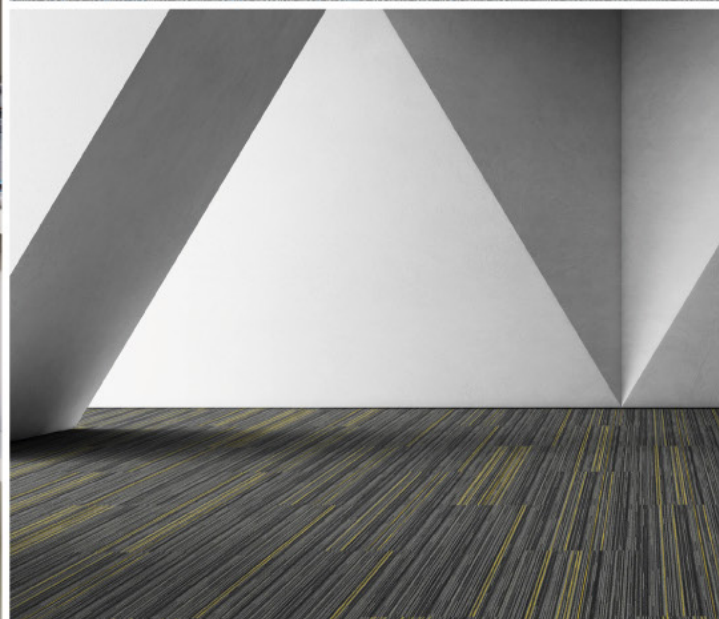


HOW TO INSTALL


QUARTER TURN




HERRINGBONE




ASHLAR



SEMI ASHLAR



RANDOM PLANK





Standard
CARPETS

www.standardcarpets.com