SPRING

CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750g/m2
NUMBER OF TUFTS	303360/m2
TUFTING GAUGE	1/12”
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0mm - 5.0mm
TOTAL HEIGHT	8.5mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS

COLOURLINE


SPRING - 825

SPRING - 854

SPRING - 855

SPRING - 876

SPRING - 878


SPRING - 885

SPRING - 892

SPRING - 894

SPRING - 898

SPRING - 899

HOW TO INSTALL

QUARTER TURN

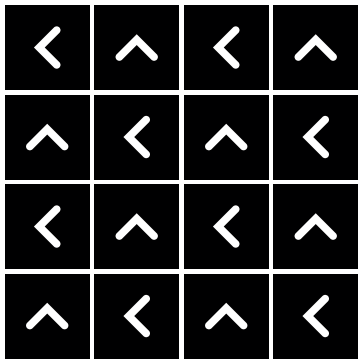

MONOLITHIC

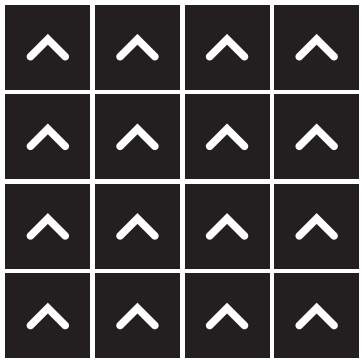

www.standardcarpets.com