

TEMPO





| | |
|---------------------------------|--|
| CONSTRUCTION | LOOP |
| PILE FIBER COMPOSITION | 100% Nylon |
| YARN TYPE | BCF |
| DYE METHOD | Solution Dyed |
| PILE WEIGHT | 530g/m2 |
| NUMBER OF TUFTS | 197000/m2 |
| TUFTING GAUGE | 1/10" |
| PRIMARY BACKING | Non-Woven |
| SECONDARY BACKING | Stable Shield - 100% Vinyl |
| OPTIONAL BACKING | Recova-PU Cushion , EcoShield-100% Recycled Vinyl |
| TILE SIZE | 50 cm x 50 cm (19.6" x 19.6") |
| PILE HEIGHT | 3.0 mm |
| TOTAL HEIGHT | 6.0 mm |
| PILE TREATMENT | INVISTA Anti-Soil Treatment, Anti-Microbial (optional) |
| RECOMMENDED INSTALLATION | Quarter Turn or Brick |

SPECIFICATIONS

COLOURLINE



TEMPO - 548



TEMPO - 557



TEMPO - 6543



TEMPO - 6545



TEMPO - 6547



TEMPO - 6557



TEMPO - 6571



TEMPO - 6576



TEMPO - 6578




TEMPO - 6579






HOW TO INSTALL

QUARTER TURN

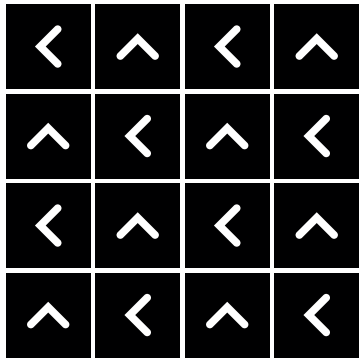

BRICK

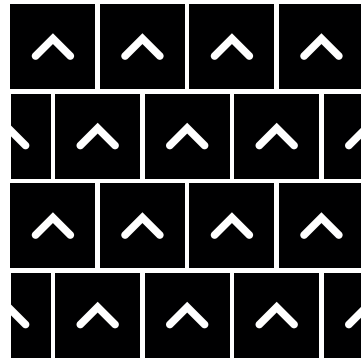



Standard
CARPETS

www.standardcarpets.com