




CONNECT




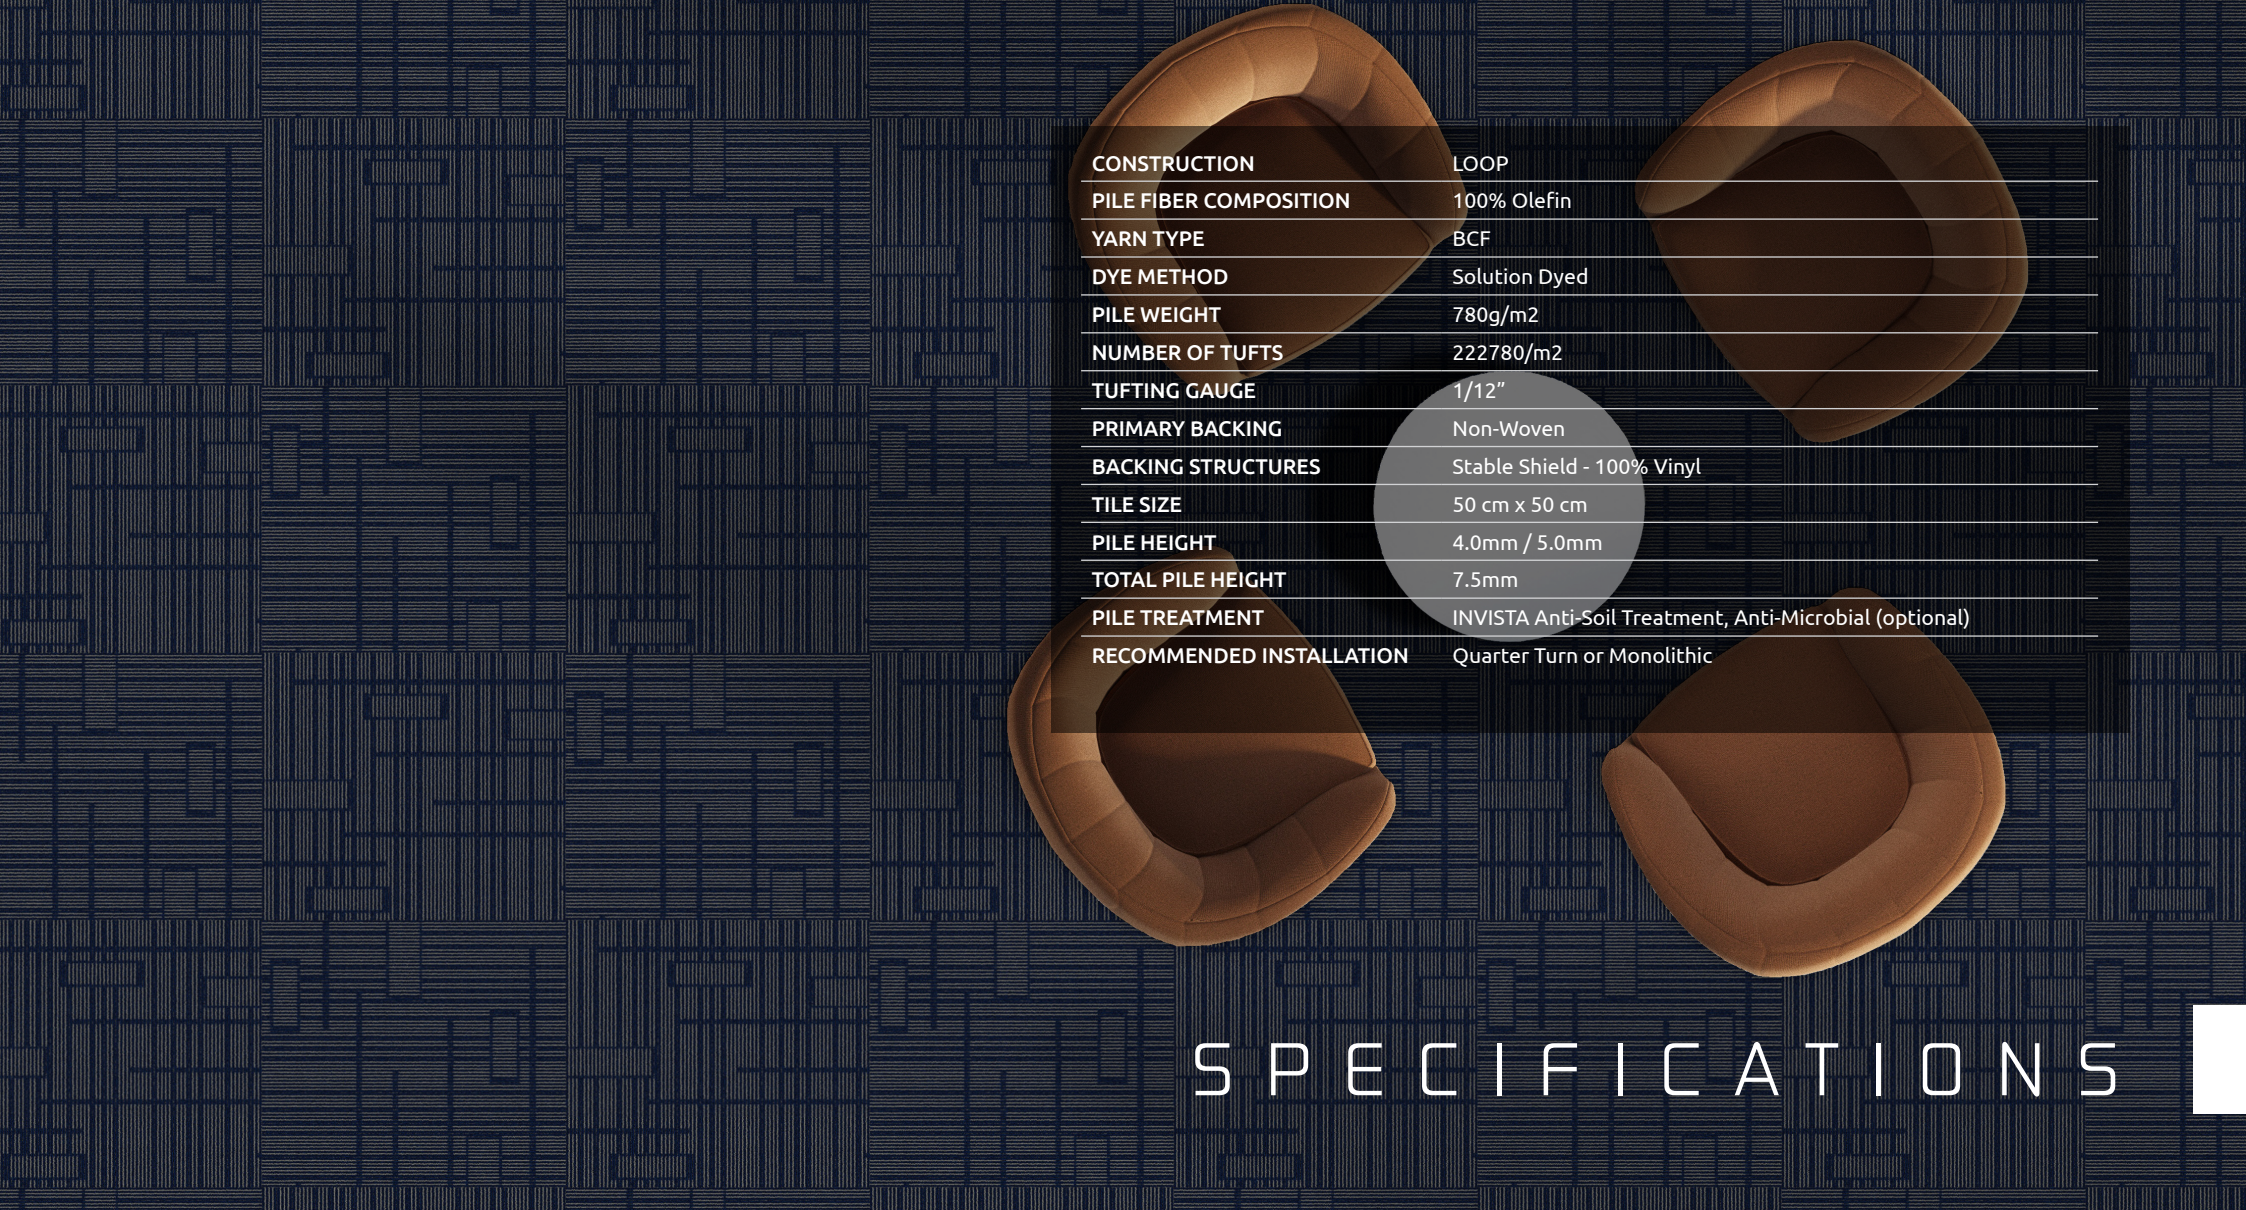


CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	780g/m2
NUMBER OF TUFTS	222780/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	Stable Shield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	4.0mm / 5.0mm
TOTAL PILE HEIGHT	7.5mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS


COLOURLINE




CONNECT - 742




CONNECT - 755




CONNECT - 756




CONNECT - 759




CONNECT - 774




CONNECT - 777



CONNECT - 779



CONNECT - 793




CONNECT - 794






HOW TO INSTALL

QUARTER TURN

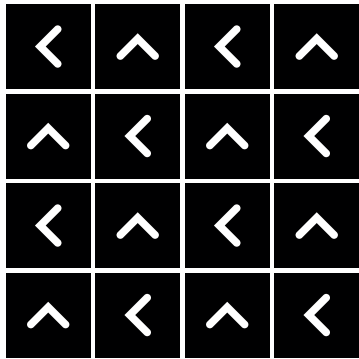

MONOLITHIC

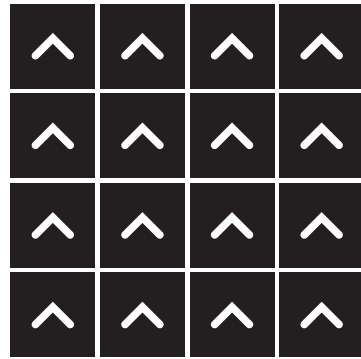



Standard
CARPETS

www.standardcarpets.com