

CONCOURSE







CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	780g/m ²
NUMBER OF TUFTS	218040/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm (19.6 in x 19.6 in)
PILE HEIGHT	4.0 mm / 5.0 mm
TOTAL HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

S P E C I F I C A T I O N S


COLOURLINE




CONCOURSE - 8847




CONCOURSE - 8863




CONCOURSE - 8873




CONCOURSE - 8874




CONCOURSE - 8875



CONCOURSE - 8876



CONCOURSE - 8878




CONCOURSE - 8896






HOW TO INSTALL


QUARTER TURN

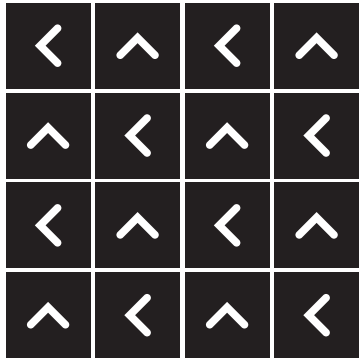


BRICK

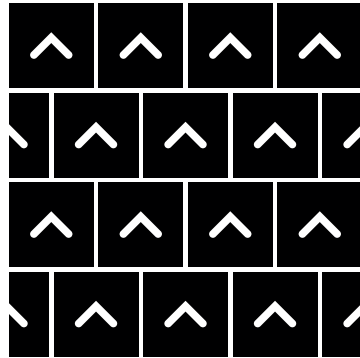

ASHLAR

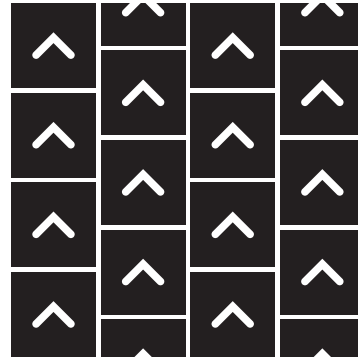

HERRINGBONE

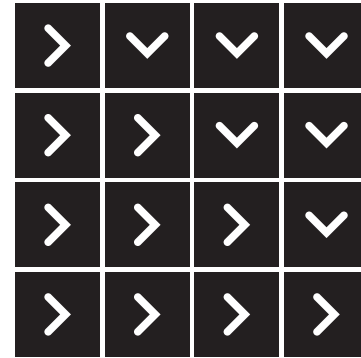



Standard
CARPETS

www.standardcarpets.com