



NEW
ORLEANS




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Solution Dyed Olefin
YARN TYPE	BCF
PILE WEIGHT	800 g/m ²
NUMBER OF TUFTS	222780/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion, EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 6.5 mm
TOTAL PILE HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


COLOURLINE




New Orleans - 774




New Orleans - 746




New Orleans - 748




New Orleans - 756




New Orleans - 757




New Orleans - 775




New Orleans - 776



New Orleans - 777



New Orleans - 778




New Orleans - 779




HOW TO INSTALL

QUARTER TURN

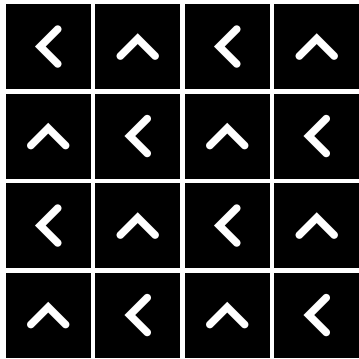

BRICK

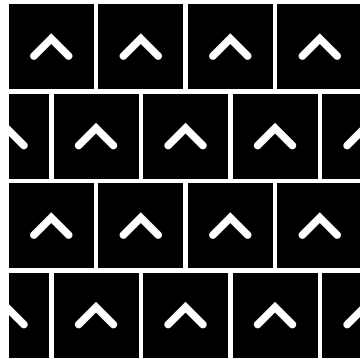



Standard
CARPETS

www.standardcarpets.com