

FEEDBACK





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	CABLE
DYE METHOD	Solution Dyed
PILE WEIGHT	610g/m2
NUMBER OF TUFTS	184860/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.3 mm / 5.5 mm
TOTAL HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


COLOURLINE



FEEDBACK - 745




FEEDBACK - 748




FEEDBACK - 754




FEEDBACK - 757




FEEDBACK - 764



FEEDBACK - 767




FEEDBACK - 775



FEEDBACK - 776




FEEDBACK - 777




FEEDBACK - 779



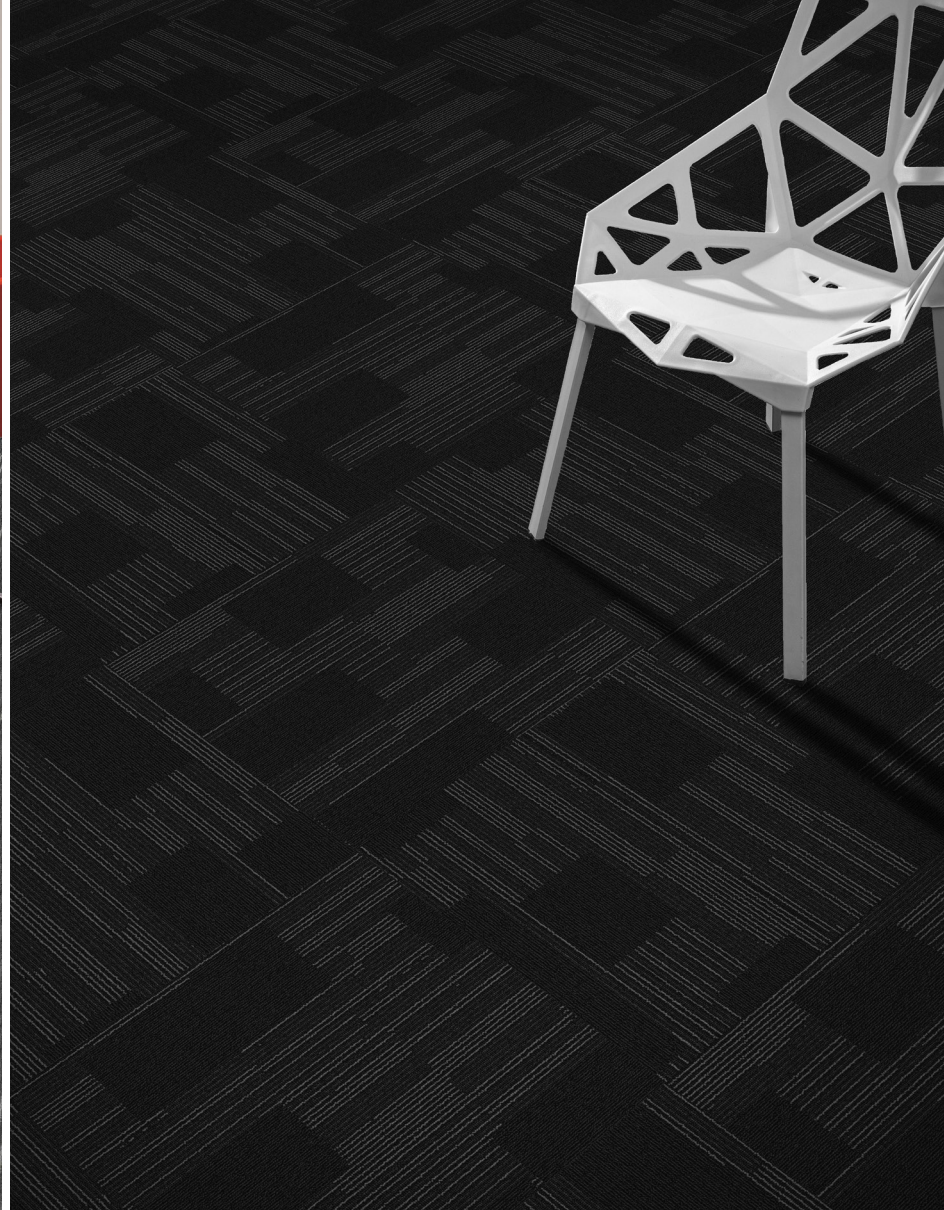


HOW TO INSTALL

QUARTER TURN

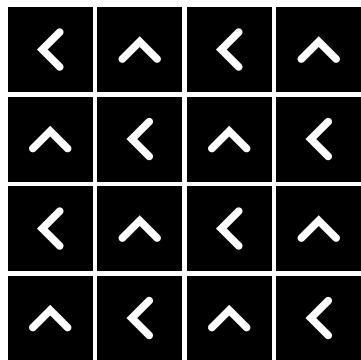

BRICK

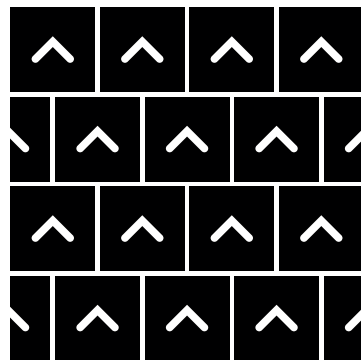



Standard
CARPETS

www.standardcarpets.com