

INTER CEPTION





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	520 g/m2
NUMBER OF TUFTS	205400/m2
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.4 mm / 5.5 mm
TOTAL PILE HEIGHT	6.00 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATIONS

COLOURLINE




INTERCEPTION- 546




INTERCEPTION - 547




INTERCEPTION- 555



INTERCEPTION- 556




INTERCEPTION- 573



INTERCEPTION - 575




INTERCEPTION- 578

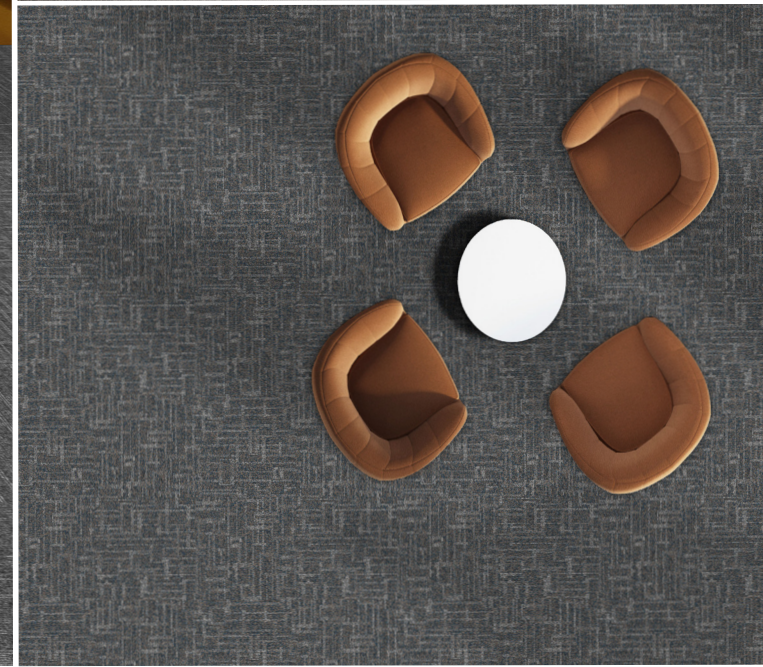

HOW TO INSTALL

QUARTER TURN

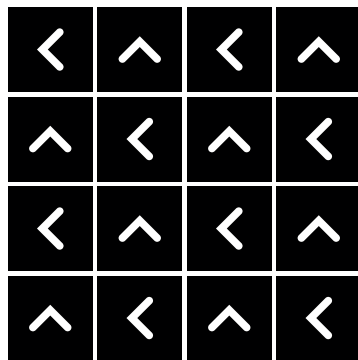



Standard
CARPETS

www.standardcarpets.com