

A modern office interior featuring three blue armchairs with chrome legs. The floor is covered in dark brown carpet tiles with a geometric pattern. In the background, there is a white table with black chairs and a wooden wall. A purple overlay with a pattern of squares and circles is in the top left corner, containing the word LIMA.

LIMA



CONSTRUCTION

PILE FIBER COMPOSITION

YARN TYPE

DYE METHOD

PILE WEIGHT

NUMBER OF TUFTS

TUFTING GAUGE

PRIMARY BACKING

BACKING STRUCTURES

TILE SIZE

PILE HEIGHT

TOTAL HEIGHT

PILE TREATMENT

RECOMMENDED INSTALLATION

VLOC

100% Nylon (Polyamide 6)

CABLE

Solution Dyed

580g/m²

189600/m²

1/12"

Non-Woven

Stable Shield - 100% Vinyl

50 cm x 50 cm

2.5mm / 5.00mm / 5.5mm / 6.00mm

8.0mm

INVISTA Anti-Soil Treatment, Anti-Microbial (optional)

Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE



LIMA - CC-746




LIMA - CC-747




LIMA - CC-748



LIMA - CC-776



LIMA - CC-777



LIMA - CC-779



LIMA - CC-794




LIMA - CC-795




LIMA - 746




LIMA - 747




LIMA - 748



LIMA - 776



LIMA - 777




LIMA - 779



LIMA - 794




LIMA - 795

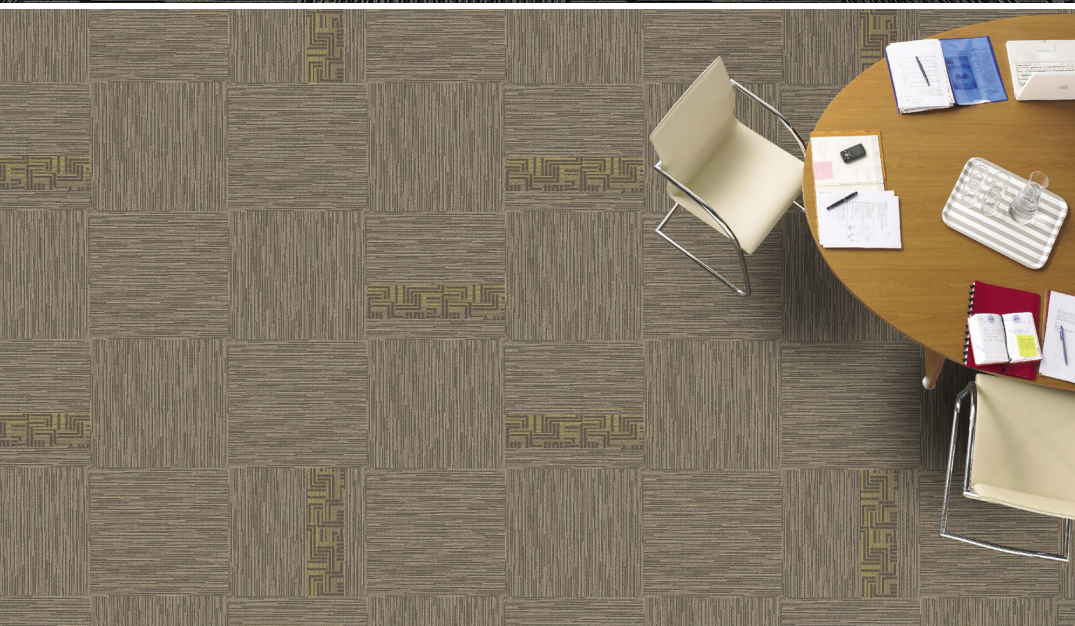




HOW TO INSTALL

QUARTER TURN

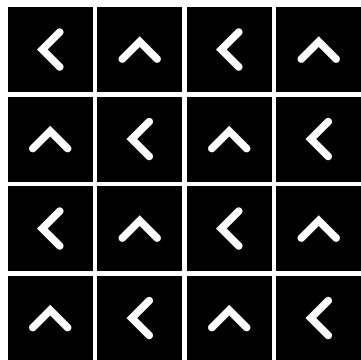

BRICK

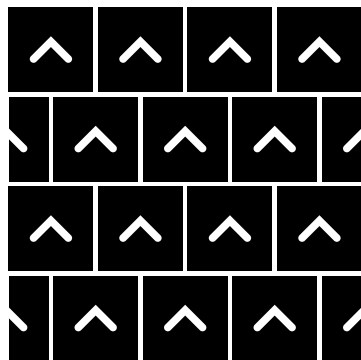



Standard
CARPETS

www.standardcarpets.com