




RECONNECT




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	780g/m2
NUMBER OF TUFTS	222750/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield, 100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	4.0 mm / 5.0 mm
TOTAL HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS


COLOURLINE




RECONNECT - 844




RECONNECT - 847




RECONNECT - 852




RECONNECT - 858




RECONNECT - 872




RECONNECT - 873




RECONNECT - 875



RECONNECT - 876



RECONNECT - 877




RECONNECT - 878






HOW TO INSTALL

QUARTER TURN

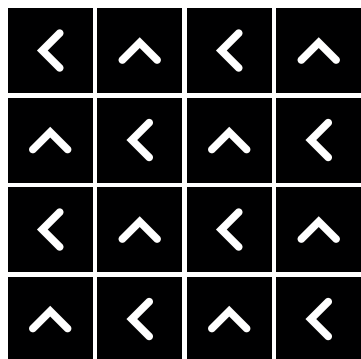

MONOLITHIC

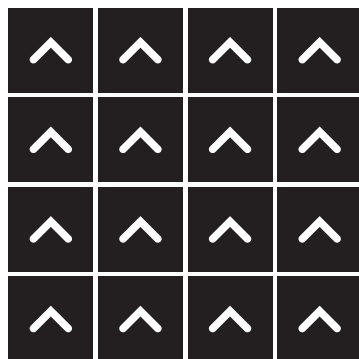



Standard
CARPETS

www.standardcarpets.com