




CARPET TILES

SPECIFICATION SHEET

CROSSWORD

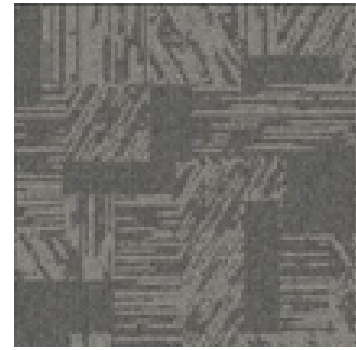

CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide6)
YARN TYPE	Frieze
DYE METHOD	Solution Dyed
PILE WEIGHT	710g/m ²
NUMBER OF TUFTS	260150/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	StableShield 100% Vinyl
OPTIONAL BACKING	Recova 500 & Recova 800
TILE SIZE	50x50cm
PILE HEIGHT	3.5mm
TOTAL HEIGHT	6.5mm
PILE TREATMENT	UV Treated Yarn, Walk Of Fame (Optional)
RECOMMENDED	Quarter Turn or Brick

PERFORMANCE SPECIFICATION

WEAR CLASSIFICATION	HEAVY CONTRACT	
VOC EMISSION	ASTM D5116-17	<0.5 mg/m ² /hour (CRI GLP)
FLAMMABILITY	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
REACTION TO FIRE	EN ISO 9239-1 (2010)	Cfl-s1
STATIC PROPENSITY	AATCC 134-2011	0.2 kV
COLOR FASTNESS	AATCC/16	5/5 on Grey Scale
THERMAL RESISTANCE	DIN 52612	.04m ² K/W
IMPACT SOUND INSULATION	ISO 140-8	ΔLw 23dB
SOUND ABSORPTION LEVEL	EN ISO 354	αw: 0.15(H)
SOILING PROPENSITY	ASTM D 6540-00	4
DIMENSIONAL STABILITY	EN 986	< 0.20%
CASTOR CHAIR TEST	ISO 4918	Rating 4.0



- Shading or Pile reversal is an inherent attribute of cut pile carpets and not a manufacturing defect
- Color may slightly vary from one dye lot to another dye lot
- Total weight of the product can have a normal variation of ± 5%
- We reserve the right to amend the above specification without prior notice with changes in raw material supplies



**Standard
CARPETS**

Standard Carpets Ind LLC
P.O. Box No. 490014
Dubai Industrial Park, Dubai UAE
T: +971 4 554 7137 | F: +971 4 554 7132
E: info@standardcarpets.com | www.standardcarpets.com

Made In The UAE. The largest manufacturer of tufted carpets and the only manufacturer of carpet tiles in the United Arab Emirates.

Standard Carpets are manufactured under the environmental quality system certified and complying with ISO 45001 by an accredited certification body.